

# PFP-38HPKHL-MF

## GAS POWERED PUMP

*This high pressure/high volume pump is made to fight fire or supply water to the fire scene. Engine and pump are mounted on a chassis made of profile steel with shock absorbers and heavy duty carrying handles.*



## ENGINE SPECIFICATIONS

- CH1000 Kohler air cooled engine.
- 2-cylinder, 4-stroke gasoline engine.
- 12V electric start.
- 6 gallon (22 L) integrated fuel tank.

## PUMP UNIT SPECIFICATIONS

- C.E.T. single stage centrifugal pump.
- Pump body made from high resistant aluminum alloy.
- Bronze impeller.
- Mechanical shaft seal.
- Stainless steel pump shaft.
- Exhaust priming system, guaranteed up to 20' (6 meter lift).
- Two 2 1/2" (65 mm) delivery outlet with pressure valve.
- One 4" (100 mm) suction inlet.
- Dimensions: Length: 34" (865 mm); Width: 24" (610 mm); Height: 31" (788 mm).
- Weight: 280 lbs (127 Kg).


## INCLUDED ACCESSORIES

- 25 Amps alternator.
- Vernier throttle.
- 12-V Battery.
- Choke control lever.
- Pressure gauge.

## PERFORMANCE

**MAX FLOW : 680 GPM**  
**MAX PRESSURE : 205 PSI**  
**515 GPM @ 25 PSI**

**310 GPM @ 100 PSI**  
**180 GPM @ 150 PSI**  
**50 GPM @ 200 PSI**

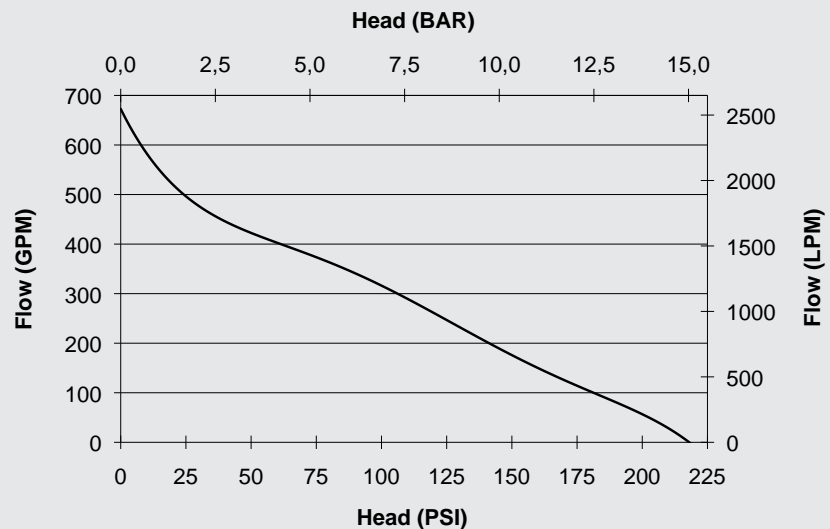


## LIMITED WARRANTY

- 2 YEARS.



ACCEPT ONLY THE BEST



A CENTURY  
OF ENGINEERING  
FOR THE BRAVEST

75 Hector St., P.O. Box 90,  
Pierreville (Québec)  
Canada J0G 1J0  
Phone : 1-800-567-2719  
Fax : 1-800-434-2613  
[www.fire-pumps.com](http://www.fire-pumps.com)