

TEMPEST™ TIC 3.3

/ECO-BOOST-SYSTEM

High Resolution Thermal imaging camera

Efficient and versatile = 3 buttons + 3.5" display

Particularly suitable for the First attack. TEMPEST TIC 3.3 offers unbeatable value and best quality, combined with all important features: ideal for firefighting, first attack, search for missing persons and fire...




Outstanding features:

- Compact 6.5 x 5.5 x 3.4"
- Lightweight 1.92 lbs with 2 batteries and side straps.
- Large 3,5" display for details visibility
- Widest detection range: -40°F to +2100°F
- Video recording, picture capture and image freeze
- Batteries: 6 year warranty, 5000 charging cycle
- Safe batteries (LiFePO4): for high temp operations
- Up to 8h running time (2 batteries) with Eco-Boost-System (up to 60% additional running time than previous model)
- · Germanium window to protect the optics
- Removable Pistol grip option
- · Boot time: less than 5 sec
- 3 Large buttons: easy to operate even with gloves
- Functions:
 - o ON/OFF
 - o Zoom x2 x4
 - Colorization selection (3 or 5 modes)
 - Image freeze / picture capture (option)
 - Video recording (option)
 - Replay picture and video on screen
 - Laser pointer (option)




Color schemes:

TEMPEST TIC 3.3 offers **3 color schemes** as standard: **Fire, Search, and Inverse**+2 color schemes as option: Cold Finder and Multicolor



STD / FIRE:
Dark Red >1560°F
Red > 1250°F
Orange > 930°F
Dark Yellow >660°F
Yellow > 400°F
White = Hot
Black = cold



SEARCH: 2 hottest % colored in Red and the 5 following hottest % in Yellow-Orange.



COLD Finder: Blue color for coldest areas



INVERSE: Same as Fire scheme but White & Black are inversed: White = Cold Black = Hot



MULTICOLOR: For Industrial applications

3 Sensitivity modes with automatic switch according observed scene:

-High sensitivity temperature range: -40 +300 °F -Medium sensitivity temperature range: -40 + 950 °F

-Low sensitivity temperature range: -40 +2100°F



Characteristics:

Tempest TIC 3.3 with Eco-Boost-System				
Dimensions	L.6.5 x W.5.5 x H.3.4" (H= +4.33" with optional pistol grip)			
Weight	1.92lbs with 2 batt / 1.73lbs with 1 batt (+0.37lbs with optional pistol grip)			
Display	3,5" LCD / 320 x 240 (76 800) px / Backlighted / Brightness: 74.32 cd/ft ²			
Frequency	60Hz Fps			
T℃ Range	-40° to +2100°F			
Colorization	Std: Fire, Search, Inverse Option: Cold Finder and Multicolor			
	Housing			
Material	PUR / Elastomer			
Drop Test	6.5 ft on concrete			
IP	IP67 / 3.2ft - 30 Minutes			
Heat resistance	300 °F for 15min / 500 °F for 5min			
	Sensor			
Micro bolometer type	Uncooled 17μ Amorphous Silicon aSi Resolution 384 x 288 (110 592 px)			
Spectral range	7 – 14 μm			
T°C sensitivity	NETD: <50mK (<0.05℃)			
	Optics			
Material	Germanium Carbon Coated Protected by a germanium window			
Focus	1.15ft to infinity / F/1.3 speed			
Visual field / FOV	H: 51° / V: 40° / Diagonal: 65°			

General						
Rechargeable batteries		iFePO ₄ (Lithium Iron Phosphate = fety VS fire), 2.5Ah at 6.6V, 0.19lbs				
Running time (68°F) with Eco-Boost- System since October 2018	>	Without video/photo functions: >8h (2 batt) / >4h (1 batt) With video/photo functions: >6h (2 batt) with non-active video >5h (2 batt) with recording video				
Boot time		< 5 seconds				
Charging voltage		12 / 24 VDC or 100-240 VAC				
Charging time (for 2 batt. / half for 1 batt.)		Charging bay: ~1h30 Mains charger: 100% in ~2h, 90% in ~1h30, 80% in ~1h20				
Charging cycles		> 5000				
Memory (optional)	8GB internal SD card (8h video or 1000 pics)					
Warranty	bat	5 years on camera_/ 6 years on teries / 10 years on thermal sensor1 year on accessories (chargers, charging bay, etc)				
Options						
Removable pistol grip		Picture capture and/or video recording (8GB capacity)				
Neck strap in flame retardant material		Vehicle charging bay or mains charger				
1 or 2 Retractable lanyards		Carrying case IP67				
Protection hood		Wireless video transmission to computer, tablet or smartphone				
Analogue output (NTSC or PAL)						



Energy concept

LiFePO4 batteries (lithium-iron-phosphate). **Benefits:**


- -Very long lifespan guaranteed 5000 charging cycles (~10 years)
- -Operating time (up to 8h with 2 batteries at the same time in the camera)

Picture capture & Video recording

Pictures (up to 1000) and Video (up to 8h) can be:

- viewed on the camera screen during operation
- Live Pictures can be sent to a computer, tablet or smartphone thanks to optional wireless stick.
- Downloaded into a computer via a USB cable



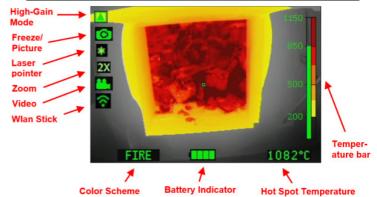



Vehicle Charging Bay

Very space-saving mountable! Power supply 12/24 VDC or 100-240 VAC. Can charge up to 4 batteries at the same time (2 in the camera and 2 spares)





Camera standard features:

	(Color modes	\$	Features							
Description	Color modes	Optional color modes	Max color modes	Battery	Freeze mode	Side trap	Video recording	Picture capture	Laser	Zoom	USB cable
TEMPEST TIC 3.3		Multicolour	5	2	V	2				\checkmark	
TEMPEST TIC 3.3 L	Fire & Search		5	2	V	2			V	V	
TEMPEST TIC 3.3 V	& Cold Inverse	5	2	V	2	V	V		V	V	
TEMPEST TIC 3.3 VL		5	2	V	2	V	V	V	V	V	

V= Video + Picture

L = Laser

Camera optional accessories:

Carrie	ia optional	accessories.
	Wireless Transmission kit	Only compatible with cameras equipped with Video recording
The state of the s	Pack of 2 spare batteries	
	Cable charger	Available in 12/24V or 100V-240V
WALA	Watertight Carrying case	IP67
and a	Vehicle charging bay	Charge batteries inside the camera
*	Laser pointer	Only for 3.3 and 4.3 models

	Vehicle charging bay with additional slots	Charge batteries in the camera + 2 extra spare batteries		
	Power supply for charging bay	Exist in 12/24V or 1 100V-2400V with US or EU plug		
	Retractable lanyard	1.1lbs or 2.2lbs tension force		
	Neck strap	Fire-proof (Kevlar)		
	Protection hood	Increases exposure time x2 to high temperatures		
1	Removable pistol grip	Pistol grip = 0.37lbs Incl. mounting tool		



