

FLEX DUCTING

PVC/Polyester Substrate with Steel Wire Helix,
Sewn Construction


TEMPEST™

Applications

- Air Conditioning
- Ambient Air Movement
- Dehumidification

Features

- Expanded pitch allows compression to one-seventh of it's total extended length
- Flame resistant in accordance with UL94VTM-O, California Fire Marshal, and NFPA701 Specifications
- Excellent UV Stabilization and mold and mildew inhibitors for rigorous outdoor use

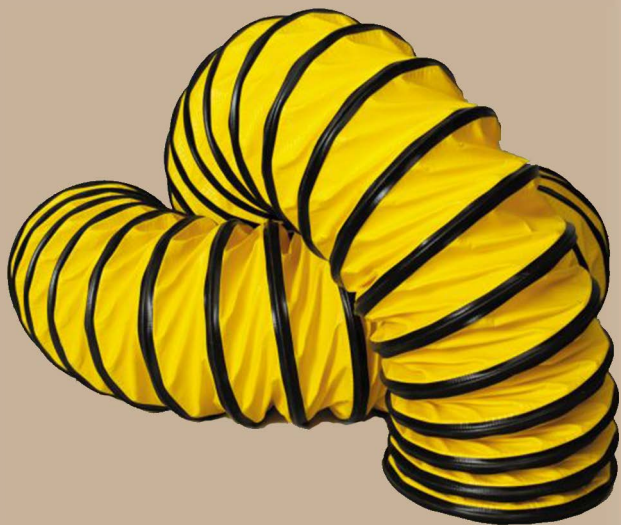

SPECIFICATIONS	
Part Number	725-109B
Weight	1399-SD 13 oz./yd. ² (441 g/m ²)
Temperature	-20° to 180° F (-29° to 82°C)
Standard Pitch	Pitch 4" (10 cm) Diameters 8" (200 mm or Larger)
Wire	Hard-Drawn Steel
Inside Diameter	6" - 36" (150 - 900 mm)
Length	15', 20' (4.5, 7.5 m)
Color	Yellow
Optional Wearstrip	Heavy-Duty Extruded, or Light-Duty PVC Fabric
Optional End Finishes	Belt Cuff, Wire Rope Coupling

TEMPEST™

4708 N. Blythe Ave.
Fresno, CA. 93722
800.346.2143

response@tempest.us.com
www.tempest.us.com
Facebook.com/tempesttechnologycorp