

# TEMPEST

Fighting for performance

INDUSTRY LEADING TECHNOLOGY AND DESIGN

POWERED BY:

MILWAUKEE® M18™ REDLITHIUM™ HIGH OUTPUT™ HD12.0 Batteries

## VS-1.3M

TEMPEST TECH SERIES  
BATTERY POWER BLOWERS



Powered by 1 and up to 3 Milwaukee® M18™ REDLITHIUM™ HIGH OUTPUT™ HD12.0 Batteries



### 65-Minute Run Time

With 3 removable Removable MILWAUKEE® M18™ REDLITHIUM™ HIGH OUTPUT™ HD12.0 Batteries, the blower will run for an average of 65 minutes or you can run off of just 1 or 2 batteries..



### Removable Battery

Powered by 1 and up to 3 removable MILWAUKEE® M18™ REDLITHIUM™ HIGH OUTPUT™ HD12.0 Batteries.



### Only 55 lbs. w/ 3 Batteries

Only 45 lbs. without batteries. Lightweight welded tubular aluminum frame design makes it easy to deploy on site.

US Patent #: US 11,333,291 B2



### Battery Management System

The dynamic BMS built into the battery insures maximum performance and safety.



### 10,000 CFM

The VS-1.3 series produces the Highest Air Flow available in any battery blower.



### FEATURING

Increased depth for greater stability  
Large 6" wheels for ease of rolling over obstacles



### LED Flow-Path Lighting

Powerful LED lights positioned low for visibility below the smoke.




### Ultra-Light™ Air Straightener

Ultra-Light™ Grill designed to reduce wasted airflow. Forces the air to flow straight out.



### WARRANTY

Blower: 5 Year Limited Warranty  
Battery: Separate manufacturers' warranty

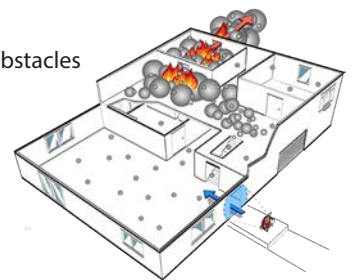

NOTE: Unit specification subject to change without notice.

4708 North Blythe Avenue, Fresno, California 93722  
tempest.us.com • response@tempest.us.com • 800.346.2143

# VS-1.3M

## TEMPEST TECH SERIES/TEMPEST POWER BLOWERS

POWERED BY: MILWAUKEE® M18™ REDLITHIUM™ Batteries

tempest.us.com



### SPECIFICATIONS

<b>Air Volume</b>	Estimated 10,000 CFM (16,310 m³/h)	<b>Motor</b>	0.4 HP / 350W Variable Speed Drive BLDC Totally Enclosed, Air over IP65
<b>Weight</b>	With batteries 55 lbs. / Without batteries 45 lbs.	<b>Battery</b>	Removable Milwaukee® M18™ REDLITHIUM™ HIGH OUTPUT™ HD12.0 Batteries, 12ah Batteries (1 and up to 3)
<b>Dimensions (L x H x D)</b>	Handle Down - 23.75"L x 25.5"H x 15.25"D Handle Up +4.9"	<b>Charging Time</b>	100% Charge in 3-hours with External Optional Charger
<b>Propeller Diameter</b>	18"	<b>Ingress Protection</b>	IP65 (excludes Milwaukee® M18™ REDLITHIUM™ HIGH OUTPUT™ HD12.0 Batteries)
<b>Run Time</b>	<i>Average run time at full speed 65 minutes with 3 x 12AH batteries</i>	<b>Drop Test</b>	Designed to resist a Drop Test of 1.5M / 5'
<b>Operating Temperature</b>	-5°F to +113°F	<b>Noise Level</b>	83.7dB at 3m-10'

### AVAILABLE OPTIONS

PART NUMBER	PRODUCT	INCLUDES
910-1870	VS-1.3M - without battery or charger	Electric Tall PPV Power Blower, Fold Down Handle, Variable Speed Drive, 18" Impeller BLDC, 1 Shoulder Strap, No Batteries, No Charger
910-1870A	VS-1.3M - 3 batteries and 1 Multi-Bay charger	Electric Tall PPV Power Blower, Fold Down Handle, Variable Speed Drive, 18" Impeller BLDC, 1 Shoulder Strap, powered by 3-Milwaukee® M18™ REDLITHIUM™ HIGH OUTPUT™ HD12.0 Batteries, Multi-Bay Charger
910-1870B	VS-1.3M - 3 batteries and 1 Single-Bay charger	Electric Tall PPV Power Blower, Fold Down Handle, Variable Speed Drive, 18" Impeller BLDC, 1 Shoulder Strap, powered by 3-Milwaukee® M18™ REDLITHIUM™ HIGH OUTPUT™ HD12.0 Batteries, Single Bay Charger

### AVAILABLE ACCESSORIES

725-070	 Flex Tube Ducting	610-1801	 Shoulder Carry Strap (1 is included with every VS1.3M)
725-049L	 Rehab Misting Ring	300-141 / 300-142	 Door Bar Holder and Bracket Set
		300-187	 (2) Pack Glow Wedges