

User manual



LEADER Cam



EN Read this manual carefully, before the first use

Product references

D11.04.342	LEADER Cam - 2,4m probe
D11.04.343	LEADER Cam - 4m probe

Contents

1	INTRODUCTION.....	3
1.1	LEADER CAM PRESENTATION	3
1.2	LEADER COM COMPOSITION	3
1.3	GENERAL FUNCTIONS	5
1.4	DETAILED TECHNICAL SPECIFICATIONS.....	5
2	LEADER CAM DESCRIPTION	6
2.1	CONTROL BOX DESCRIPTION.....	6
2.2	CONNECTION DESCRIPTION.....	7
2.3	KEYBOARD DESCRIPTION	8
2.4	DESCRIPTION OF THE TELESCOPIC BOOM	9
2.5	AUDIO HEADSET DESCRIPTION.....	11
3	USING THE CONTROL BOX.....	12
3.1	CONTROL BOX POWER SUPPLY.....	12
3.2	POWERING ON THE CONTROL BOX.....	13
3.3	USING THE SUN SHIELD	14
4	MENU: DESCRIPTION OF THE CAMERA MODE FUNCTIONS	15
4.1	USING THE MAIN FUNCTIONS	15
4.1.1	<i>Camera direction function.....</i>	<i>15</i>
4.1.2	<i>Boom end lighting intensity function.....</i>	<i>16</i>
4.1.3	<i>Push to Talk function (Communicating with the victim).....</i>	<i>16</i>
4.2	MENU: DESCRIPTION OF THE SEARCH CAMERA MODE ICONS.....	17
4.2.1	<i>Zoom function.....</i>	<i>18</i>
4.2.2	<i>Image rotation function.....</i>	<i>19</i>
4.2.3	<i>Photo / video recording functions.....</i>	<i>20</i>
4.2.4	<i>Photo / video viewing function.....</i>	<i>24</i>
4.2.5	<i>Right hand / left hand function</i>	<i>26</i>
4.2.6	<i>Screen brightness function.....</i>	<i>26</i>
4.2.7	<i>Audio headset function.....</i>	<i>27</i>
4.2.8	<i>Loud speaker function.....</i>	<i>27</i>
5	TROUBLESHOOTING	28
6	WARRANTY	29

1 INTRODUCTION

1.1 LEADER Cam presentation

Is for use in the rescue of buried victims, the **LEADER Cam** is equipped with a search camera mode with an audio sensor to see and communicate with victims. This equipment has been designed to accurately and visually locate victims in confined spaces, to dialogue with them and assess their need for assistance and rescue.

1.2 LEADER Com composition

- 1 Watertight and shock proof transport case.
- 1 Control box with screen and keyboard with its straps (shoulder strap and hand strap).
- 1 2.4m telescopic boom fitted with a pivoting camera, lighting and a microphone and loud-speaker module.
- 1 Camera head protection cap to be refitted after use.
- 1 Boom support strap.
- 1 Stereo anti-noise headset with microphone.
- 1 rechargeable control box battery pack.
- 1 100/240V 50/60Hz charger block delivered with a set of international adapters.
- 1 Backup battery pack for 10 AAA batteries (not included).
- 1 Sun shield.
- 1 Articulated arm used to fix the control box to the boom.
- 4 Yellow caps to seal the boom tip for immersion.
- 1 Micro SD card to record and view photos/videos.

Available options :

- 1 Stereo noise reducing headset with microphone and suitable connectors **(Ref: D11.04.340)**.
- 1 Extra battery pack **(Ref: D11.04.341)**.
- 1 90m reel of cable fitted with a pivoting camera, lighting and a microphone and loud speaker adaptable to the LEADER Cam. **(Ref: D11.04.346)**.
- 1 90m reel of cable fitted with a watertight camera and lighting adaptable on the **LEADER Cam. (Ref: D11.04.347)**.
- 1 4m long telescopic boom.
- 1 25m extension **(Ref: D11.04.356)**.



- Read the instructions carefully before using the product.
 - The device should not be dropped or suffer shocks.
 - Do not disassemble the product as this will invalid the warranty.
- Do not attempt to repair the product or replace parts (except when this manual provides specific instructions to do so). Refer all servicing to your distributor, or at Leader maintenance service.



1.3 General functions

FUNCTIONS	IN SEARCH CAMERA MODE
Digital x 2 zoom	Yes
Audio headset volume control	Yes
Microphone volume control	Yes
Push to Talk	Yes
Screen brightness control	Yes
Left and right handed user	Yes
Image rotation top (0°) bottom (180°)	Yes
Battery charge level indication	Yes
Picture taking	Yes
Video recording (with no sound)	Yes
Audio recording (recording of sounds on the communications boom)	Yes
Photo and video gallery to view recordings	Yes

1.4 Detailed technical specifications

Refer to product data sheet available on our website at www.leader-group.eu.

2 LEADER CAM DESCRIPTION

2.1 Control box description

The polypropylene control box is composed of:

- A 7-inch TFT colour 16/9 high brightness screen.
- A keyboard for settings and scrolling through the different menus.
- A rechargeable battery pack.
- A removable aerial to communicate with the wireless seismic sensor(s).
- Connectors for the watertight connection of the camera and audio headset. Colour coding to assist in the rapid connection of each element to its corresponding connectors.
- A watertight cap to fit to the aerial connector when not used.
- A bump protector around the edge for better shock protection.
- 4 attachments to fix the carrying strap and the handle.

The control box:

- Has an ergonomic graphic interface including an intuitive menu with subtitles in English only.
- Is reversible for use by a right handed or left-handed operator (function selectable from the menu).
- IP54, i.e. water and dust resistant.
- Has been tested to be resistant to 2 metre falls.
- Offers the possibility of using a second optional headset at the same time as the first, for use by an interpreter, a doctor or an instructor.
- Is supplied with a sun shield.



- To clean, use a dry and soft cloth.
- Never use solvents, or alcohols of any kind, to avoid discoloration and / or distortion of the unit.
- Avoid blows or excessive pressure on the screen.

2.2 Connection description

For easier connection of the accessories:

- Each female connector on the control box is identified using a colour code and a symbol.
- Similarly, the cable for each accessory has a coloured ring around the male connector corresponding to the colour code on the control box connectors.




The audio / USB connector is used to connect either the audio headset or a specific USB stick supplied by **LEADER** to update the software when necessary. No other USB peripherals should be connected.

2.3 Keyboard description

The keyboard has photo luminescent keys for better visibility in the dark.

The keyboard is reversible for use by a right handed or left handed operator. To switch from one to the other, the corresponding function must be selected.

"Right hander mode" view:

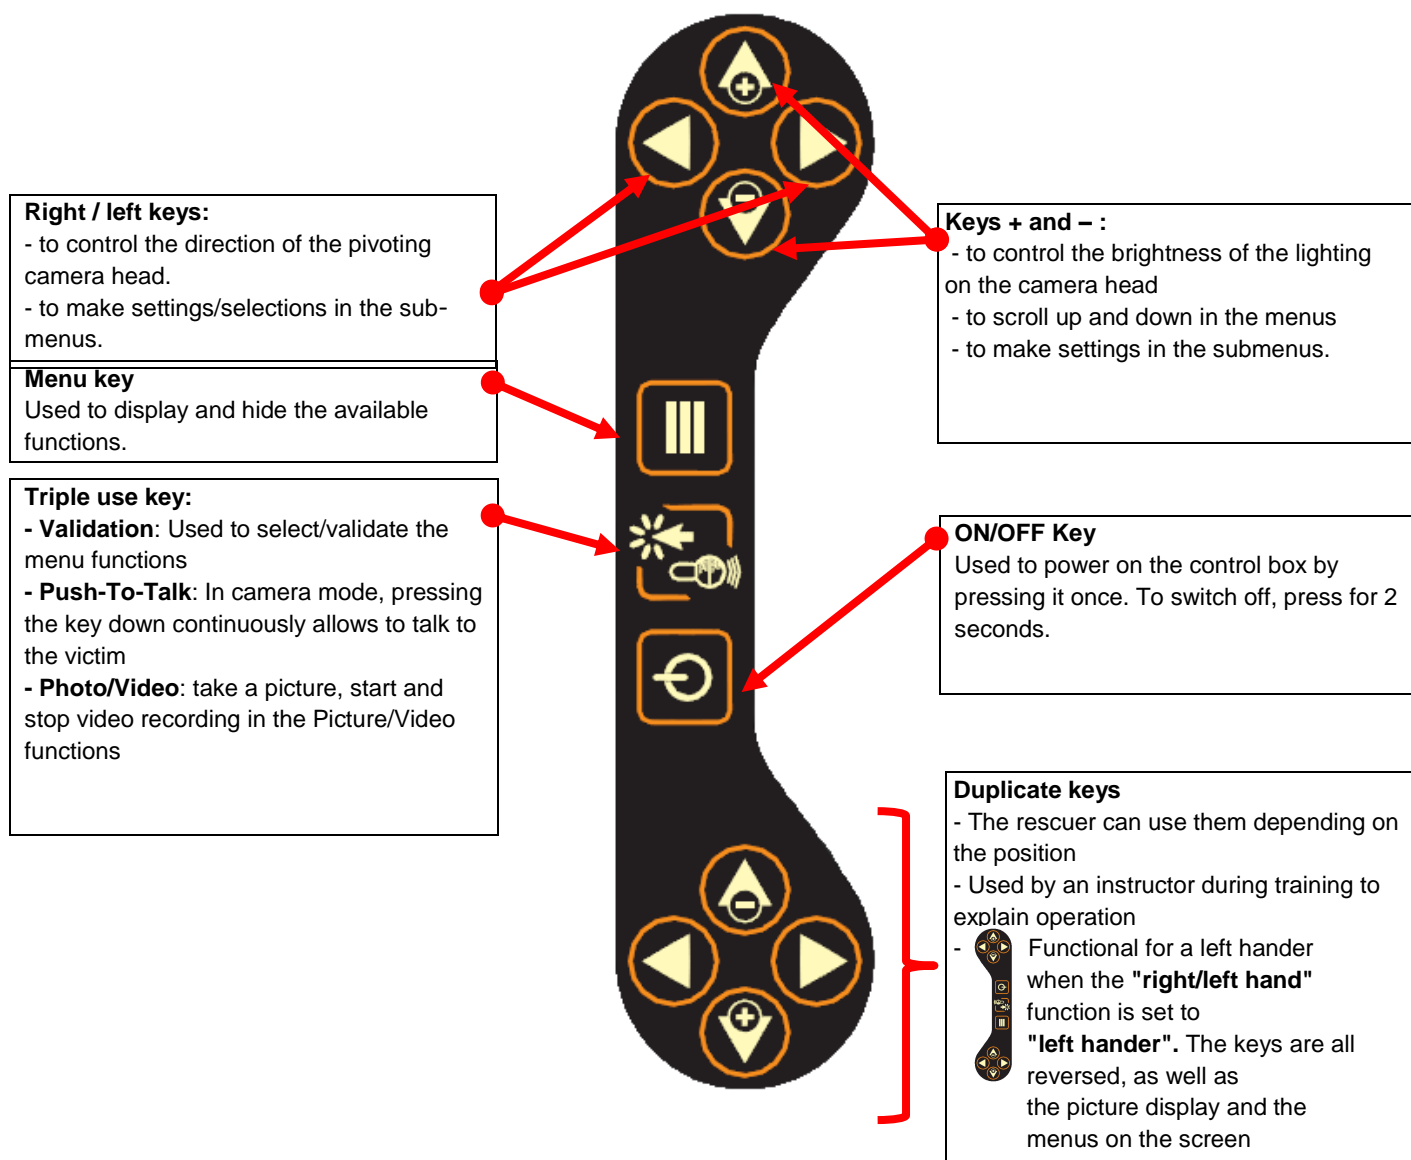

2.4 Description of the telescopic boom

The carbon fibre boom is lightweight and robust.

It is equipped with a head including a camera, LED lighting, and a microphone/speaker module.

The 47mm head diameter makes it possible to insert it into standard 51mm diameter core driller holes.

The sensitivity of the microphone makes it possible to hear whispers.

The camera head can be mechanically oriented 85° to the right and 85° to the left (170° total). The directional camera and head provide a 260° field of vision without any blind spots. The telescopic boom extends from 1.10 to 2.40 m (option: telescopic boom from 1.10 to 4 m) and it has a removable handle.


- **Camera head protection**

The camera head mounted on a flexible articulation is protected by a watertight plastic sleeve over its entire length and by a non scratch sapphire lens on its face.



- **Control box fixture to the boom**

The supplied "articulated arm" is used to fix the control box to the boom. This accessory composed of a flexible metal part can be bent at will to point the screen to the required position.

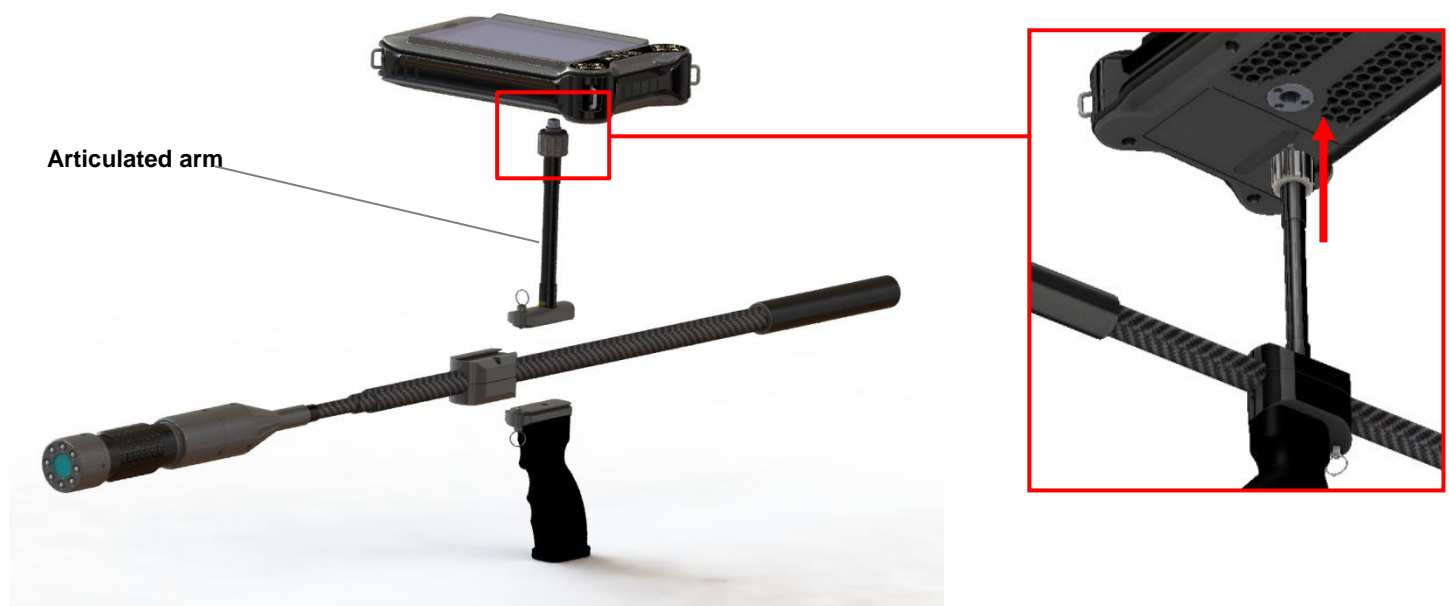



- **Removable handle**

The boom handle is removable to be able to pass the entire boom length through a 51 mm diameter hole. To remove the handle, pull the pin towards the bottom and slide the handle to the rear.



- **Camera head water tightness for immersion**



This system makes it possible to search under water to a maximum depth of 2m.

To make the camera head watertight, a cap needs to be fitted to the microphone/loud speaker. The metal microphone/loud speaker mesh must be unscrewed and replaced by the watertight cap.



2.5 Audio headset description

The **LEADER Cam** has a noise reducing headset with a microphone. It is equipped with a neck band, an omnidirectional microphone, 2 300 ohm earpieces and a connection cable (length 2 m) with a specific watertight connector once connected to the control box.

The audio headset is used to:

- communicate with the victim in search camera mode
- to listen to the wireless sensors in seismic mode



A second optional headset can be connected to the control box using a Y connector allowing two headsets to be connected to the same connector.

3 USING THE CONTROL BOX

3.1 Control box power supply



The **LEADER Cam** is delivered with a lithium polymer battery pack which is inserted into the back of the control box.



The battery pack is recharged **SEPARATELY** from the control box.

Charging can be carried out at between 0°C and 45°C (maximum temperature) using the supplied charger.

During charging, a LED located on the charger provides the following indications:

-  Green: battery charged or battery not connected to the charger.
-  Red: battery charging.

During operations, if the battery pack is run down, the user can either use another battery pack (supplied as an option), or the backup battery pack as a replacement for the initial battery pack. The backup battery pack requires 10 AAA batteries (not provided).



The battery pack can **ONLY** be charged using the supplied charger block. It can be used with 100/240v AC - 50/60Hz

The international adapters can be used to recharge the battery pack on all US, Australian, European, and UK power outlets.



Battery pack



Charger block

Mains adapters

Once the appliance is powered on, if the camera or at least one seismic sensor is turned on, an icon showing the battery pack charge level remains displayed on the top right of the screen.



5 icons to show the control box battery pack charge level



Icon displayed when the backup battery pack is being

3.2 Powering on the control box



Powering on

The device is powered on by pressing the **ON/OFF** key once.




On powering on, a first screen is displayed.

A loading screen quickly follows. On the bottom left of the screen it shows the version of the device software and on the bottom right the serial number.



If neither the boom nor the sensors are connected, the screen shows the following icons "**camera not connected**" and "sensor not connected". The device will remain on this screen for 5 minutes before powering off automatically if no action is detected.

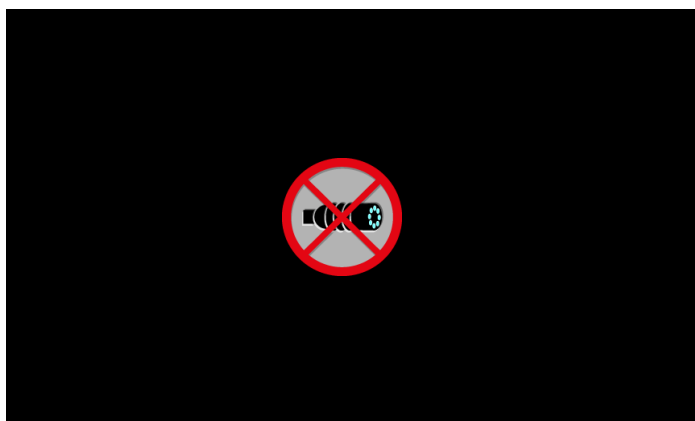

If, on the other hand, either the camera or the sensor(s) are connected, then the screen is only displayed briefly until the control box detects the connection(s).

Turning off the control box

To turn off the control box, press the **ON/OFF** key for 2 seconds.



A message is displayed indicating that the battery should not be removed until the message disappears: *"Please, **DO NOT REMOVE** the battery pack while this message is displayed"*

Please follow these instructions so that the software closes correctly and to guarantee it operates correctly the next time it is launched.



3.3 Using the sun shield



In bright light, the sun shield is used to place the screen in a dark area to be able to see it better.

To hold the sun shield on the control box it must be correctly positioned on the face on the forms designed to this effect. The red line shows the position.


The wide elastics are used

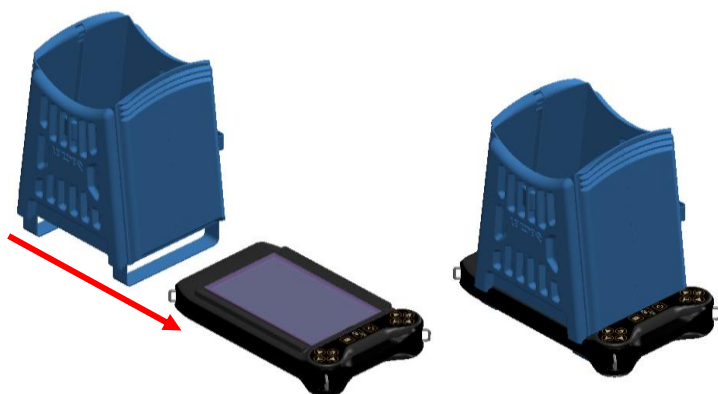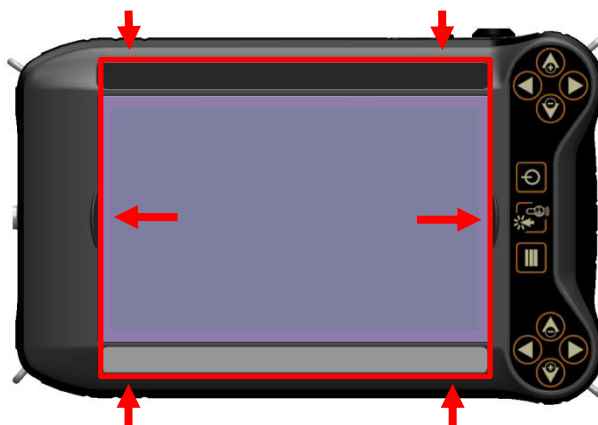



It is stored flat for easier transport. An elastic on its side is used to keep it flat and fix it to the control box. By placing it on the screen face, it protects the screen when moving around when the search device is not in use. It has small inner pockets to store an SD photo card for example.

4 MENU: DESCRIPTION OF THE CAMERA MODE FUNCTIONS

4.1 Using the main functions

The search camera mode and its menu appear when the boom is connected. Pressing the menu button  accesses the different functions.

Up to ten icons can then be selected. The "▲" and "▼" navigation keys are used to select the required function.

Pressing the validation key  gives access to the required function. Pressing the menu key  again exits the menu window and returns to the main screen.




4.1.1 Camera direction function

The right/left camera orientation is achieved using the ► or ◀ keys without using the menu. When the camera rotates, an icon is displayed on the screen showing its position.

The camera head can be mechanically oriented 85° to the right and 85° to the left (170° total). The directional camera and head provide a 260° field of vision without any blind spots.

- Pressing keys ► or ◀ first displays the icon and shows the camera position.
- Pressing the ► or ◀ key again moves the camera to the right or left depending on the key that is used. On the screen, the position icon shows 9 increments. The key must be pressed several times to pass from one increment to the next. Keeping the key pressed down permanently rotates the camera continuously.
- The icon disappears after 2 seconds if there is no action on the ► or ◀ keys.



Example of right rotation.

The blue axis shows the direction.

The orange zones show the field of vision.

4.1.2 Boom end lighting intensity function

The intensity of the lighting at the tip of the boom is controlled directly using the ▼ and ▲ keys without using the menu. When modulating the lighting, an icon is displayed on the screen showing the intensity level:

- 8 lighting intensity levels can be selected.
- Pressing the ▼ or ▲ keys displays the icon and checks the lighting intensity.
- The lighting only changes when the ► or ◀ keys are pressed a second time.
- Continuously pressing a key makes it possible to increase or decrease the lighting intensity continuously.
- The icon disappears after 2 seconds if there is no action on the ► or ◀ keys.



*Example of the
"lighting" icon*

4.1.3 Push to Talk function (Communicating with the victim)

By default, listening to the victim has priority. Transmission from the rescuer to the victim is established by keeping the Push-to-talk key pressed down (press to talk). Transmission to the victim does not allow the victim to be listened to while the Push-to-talk button is being pressed.



A second headset can be connected (supplied as an option). The second headset has the same functions as the first.

If the **Push-to-Talk** button is not pressed, both headsets communicate with each other without the victim being able to hear.

4.2 Menu: Description of the Search camera mode icons



- The "**picture zoom**" function is used for digital enlargement. The displayed image can be enlarged twice (Digital zoom x2).



- The "**picture rotate**" function is used to rotate an image by 0°, and 180° on the screen.



- The "**video**" function is used to record videos on the micro SD card.




- The "**picture**" function is used to take shots and record them on the micro SD card.



- The "**left/right hand**" function is used to allow the control box to be used by a left handed or right handed operator by reversing the image, function display on the screen, and the keyboard operation.




- The "**brightness**" function is used to set the screen brightness.



- The "**headset**" function is used to control the headset volume when listening to the victim.



- The "**speaker**" function is used to control the volume of the loud speaker at the tip of the boom. It is used for communications between the rescuer and the victim.




- The "**gallery**" function gives access to the video recordings and pictures taken using the "**video**" and "**picture**" functions to view them on the screen.



The "**picture zoom**", "**picture rotate**", "**picture**", "**video**" and "**left/right hand**" functions can be used at the same time.

Once the functions have been selected, miniature icons appear at the top right of the screen. They remain on the screen permanently until they are deactivated.




4.2.1 Zoom function

The "**picture zoom**" function is used for digital enlargement. The displayed image can be enlarged twice (Digital zoom x2).




To zoom: select the "**picture zoom**" function from the menu then press the validation key. Once on the sub-menu, select "**zoom in**" then press the validation key to activate the function and enlarge the picture by 2.

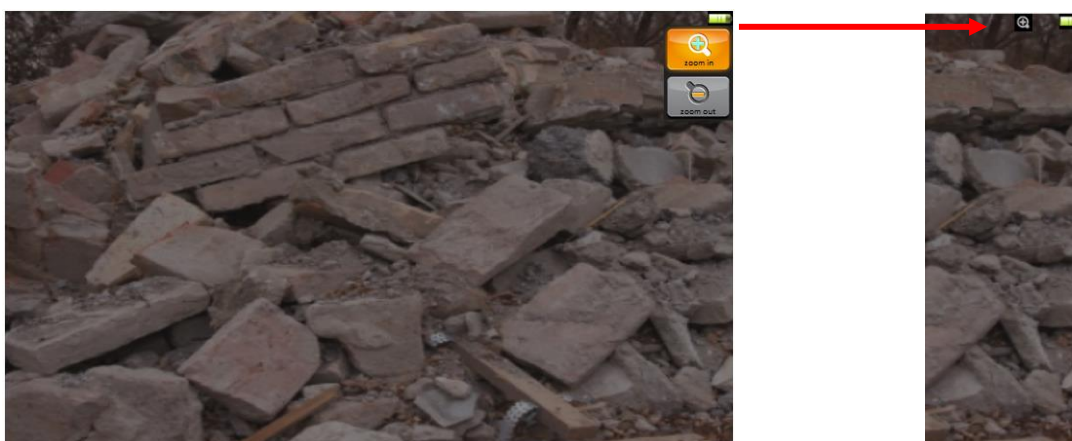

A magnifying glass icon  appears at the top right of the screen to indicate that the image has been enlarged

To zoom out: select the "**picture zoom**" function from the menu then press the validation key. Once on the sub-menu, select "**zoom out**" then press the validation key to activate the function and display the picture at its normal x1 size.

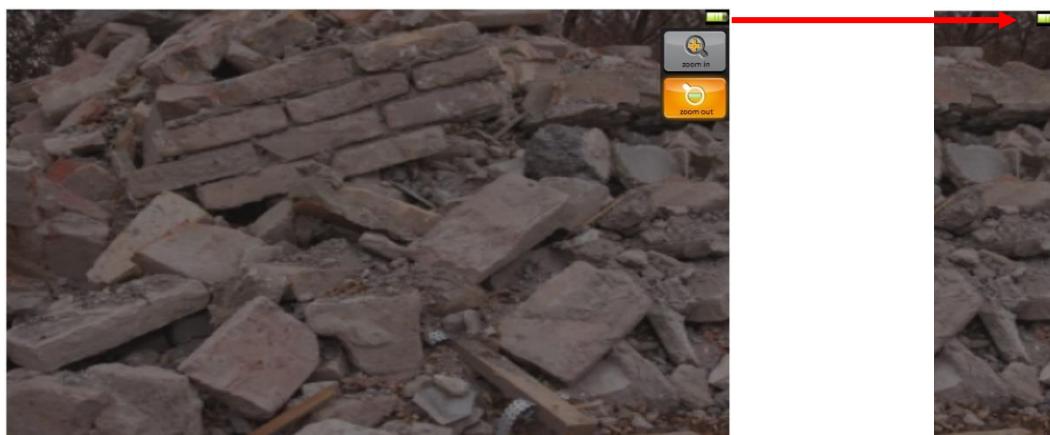

The magnifying glass icon then disappears from the top right of the screen.



4.2.2 Image rotation function

The "**picture rotate**" function is used to rotate an image by 0°, and 180° on the screen.

- By default the image is displayed the right way up at 0°.



- To rotate by 180°, select the "**picture rotate**" function from the menu then press the validation key. Once on the sub-menu, use the keyboard ▼ key directly. The image rotates immediately.

An ▼ icon appears at the top right of the screen to indicate in what direction the image is now positioned. The middle tip of the triangle shows the top of the image.



- To place the image back at 0°, press the ▲ key directly if you are still on the sub-menu. Otherwise select the "picture rotation" function from the menu then press the validation key. Once on the sub-menu, use the keyboard ▲ key directly. The image rotates immediately.



4.2.3 Photo / video recording functions


The **LEADER Cam** has a picture taking and a video recording function. These two functions are only available if a microSD backup card is in the control box reader.

A Class 10 4Go card is inserted in the reader of each delivered control box.

The number of pictures and recorded video times vary depending on the number of pictures and videos taken as the intervention progresses. However, as an indication:

- If only pictures are taken (with 1Go): 1000 pictures can be saved.
- If only videos are recorded (with 1Go): about 1 hours of video can be saved.

The microSD card reader is located under a flap behind the control box. To access it, remove the battery pack.

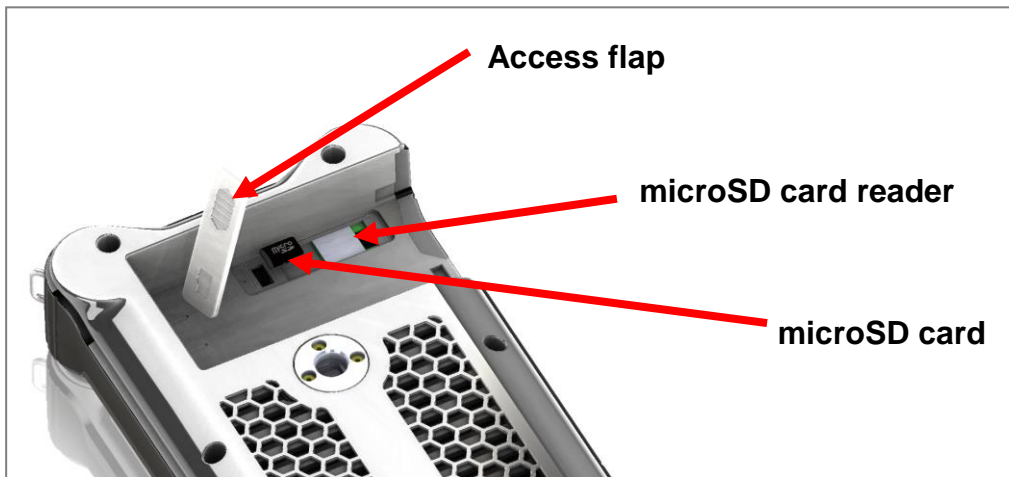

The "picture" (photos), "**video**" and "**gallery**" (viewing pictures/videos) are only active when a microSD card is present in the control box.

Otherwise the icons for these functions are greyed out.




Picture taking function





The "**picture**" taking function is used to take shots and save them on the microSD card. To take a shot select the "**picture**" function from the menu then press the validation key.



Each time a picture is taken the  icon appears at the top right of the screen to show that the picture is being saved to the microSD card. The menu also disappears when this is complete.



When the  icon reappears, the device is ready to take another picture. It is not, therefore, required to press the validation key again for this  icon to reappear.





Video recording function

The video function is used to record videos on the micro SD card.

To record a video, select the **"video"** function from the menu then press the validation key.

This action triggers the video recording and removes the menu from the screen.





When recording, the  and  icons appear alternatively on the top right of the screen to indicate that a video is currently being recorded.





To stop recording, select the "**video**" function from the menu then press the validation key.




The  and  icons disappear, as does the menu. The camera image reappears on the screen by itself.



The "**video**" function can be used at the same time as the following functions:

- **Picture zoom**; If this function is active, the magnifying glass icon  is displayed at the top right of the screen. On the other hand, the recorded video ignores the x2 zoom. The images are recorded at normal x1 size.
- **Picture rotate**; If this function is active, the  icon is displayed at the top right of the screen. On the other hand, the recorded video ignores the selected rotation value.
- **Left/right hand**; If this function is activated for left handed people you will notice the fact because the control box will be operated using your left hand. The image, the menu on the screen, and the keyboard keys will all have been reversed. No icon is displayed to avoid cluttering the screen.
- **Brightness**; This function which controls screen brightness remains accessible using the menu.
- **Headset**; This function which controls the audio headset volume remains accessible using the menu.
- **Speaker**; This function which controls the boom tip loud speaker volume remains accessible using the menu.

The camera head **rotation and lighting** functions are operational during recording.




4.2.4 Photo / video viewing function

The function is only available if the microSD card is present in the control box.

Pictures and videos are viewed using the **"gallery"** function. To access the function, select the **"gallery"** icon from the menu then press the validation key.




The photo or video that is centred on the screen is historically the first that was saved. You therefore need to scroll through all the previously saved photos and videos to be able to view the last photo or video.

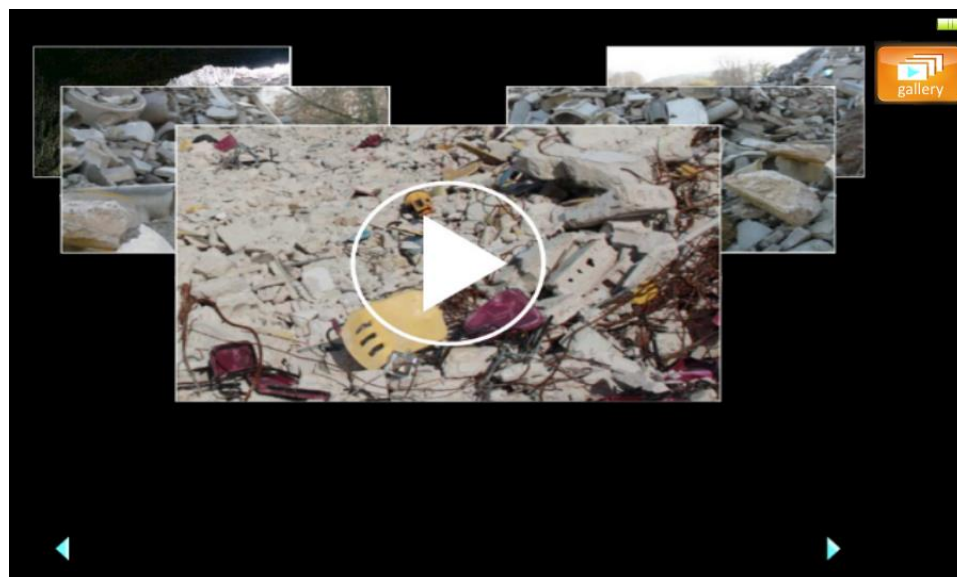

Scrolling in the **"gallery"** function uses the ◀ and ▶ keys on the keyboard. Pressing the validation key is used either to read or stop reading the pictures and videos. When a selected file is being played, the image is enlarged to full screen size.

When the end of a video is reached, it stops and displays the "stop" icon  to confirm the end of the video.

Videos are identifiable by the  icon which is embedded over the displayed image. Photos do not have an icon.

The menu key is used to exit the **"gallery"** function.

The pictures and videos can also be read on a computer. Software compatible with the file formats is required:

- Photo formats: Viewable using **"Xnview"** software, downloadable:
<https://drive.google.com/drive/folders/0B2x7i5oli1SsVTNlc3pyLTNlNlk?usp=sharing>
- Video formats: Viewable using the **"Zoom player"** software downloadable:
<https://drive.google.com/drive/folders/0B2x7i5oli1SsLUYtV3A5RXFtcEk?usp=sharing>

To read the files insert the microSD card in the SD microSD adapter (supplied). Then insert the adapter into a computer which has a card reader. Then open the file using the correct software.

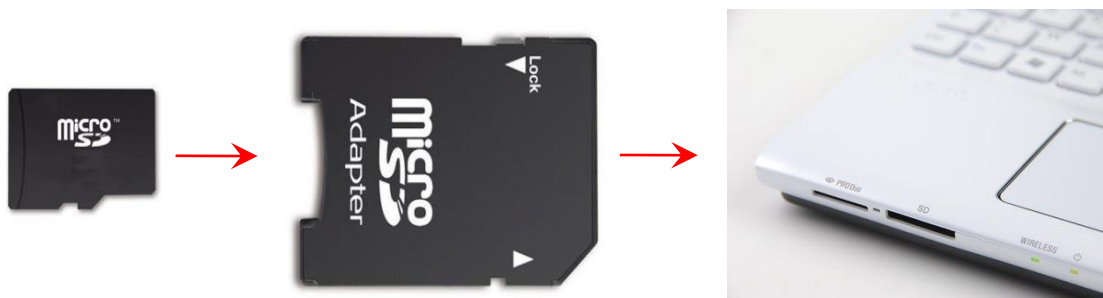


Photo and video files can only be deleted from a computer.



4.2.5 Right hand / left hand function

The **"left/right hand"** function is used to set the control box for use by a left handed or right handed person. To access the function, select the **"left/right hand"** icon from the menu then press the validation key.

When selected the function reverses the image and the function displays (menu and sub-menu), as well as the keyboard operation.

By default the software is set for use by a right handed person.



4.2.6 Screen brightness function

The **"brightness"** function is used to vary the screen brightness to adapt to surrounding light conditions.

To access the function, select the **"brightness"** icon from the menu then press the validation key. Once the function has been selected, use the ▲ and ▼ keyboard keys to increase or lower the brightness of the screen.


Reducing the brightness also saves battery power during the intervention and increases the equipment's autonomy.

By default, brightness is set to 50% of its power.

The device memorises the brightness setting. The user can therefore switch from search camera mode to seismic sensor mode (and vice versa) without the setting being impacted.



4.2.7 Audio headset function



The **"headset"** function is used to control the headset volume when listening to the victim.

To access the function, select the **"headset"** icon from the menu then press the validation key. Once the function has been selected, use the ▲ and ▼ keyboard keys to increase or lower the volume on the connected headset(s).

A second optional headset can be connected. It is supplied with a Y connector used to connect both audio headsets to the control box.




4.2.8 Loud speaker function

The **"speaker"** function is used to control the volume of the loud speaker at the tip of the boom. It is used for communications between the rescuer and the victim.

To access the function, select the **"headset"** icon from the menu then press the validation key. Once the function has been selected, use the ▲ and ▼ keyboard keys to increase or lower the volume on the connected headset(s).



5 TROUBLESHOOTING

Problem	What to do
The control box will not start	<ul style="list-style-type: none"> • Check that the battery is charged. • Check that the battery pack is connected. • Check that the battery is not charging when connected to the control box.
Boom not detected	<ul style="list-style-type: none"> • Check that the boom cable (orange) is not damaged. • Check that the boom connector is correctly connected.
The Photo, Video and Gallery functions are greyed out	<ul style="list-style-type: none"> • Check that the microSD card is in the control box
Little or no sound in the headset	<ul style="list-style-type: none"> • Check that the audio volume has not been reduced. • Check that the headset is properly connected.
No image or blurred image	<ul style="list-style-type: none"> • Check that the boom protector cap has been removed
The following icon appears 	<ul style="list-style-type: none"> • There is a software error Note down the message on the screen and contact Customer service

6 WARRANTY



LEADER SAS guarantees the original purchaser of the **LEADER Cam** that the equipment is free of equipment and labour defects for two (2) years from the purchase date for the control box, the boom and the sensors, and one (1) year for the rechargeable battery. This limited warranty is only applicable to the original buyer and not for third parties to whom the equipment may have been resold.

LEADER SAS's duties under this warranty are specifically limited to the replacement or repair of the equipment (or its parts) after it has been inspected by **LEADER** and considered by **LEADER** to be defective. To be able to benefit from this limited warranty, the claimant must send the equipment to **LEADER SAS** within a reasonable time of having discovered the said defect. **LEADER** will inspect the equipment. If **LEADER** determines that it is liable for the defect, the company will resolve the problem in a reasonable time. If the equipment is covered by this limited warranty, **LEADER** will pay the costs of the repairs.

In the situation where any defect for which **LEADER** is liable under this limited warranty could not be reasonably resolved by a repair or a replacement, **LEADER** may then choose to refund the purchase price of the equipment, from which a reasonable depreciation value will be deducted, in order to fulfil its duties under this limited warranty. If **LEADER** decides to do this, the claimant must send **LEADER** the equipment free of charge and free of any liabilities or constraints.

This warranty is limited. The original purchaser, any person to whom it may be transferred, and any person who is the intended beneficiary of the equipment or not, cannot claim the payment of any damages from **LEADER** in the event of injuries and/or material damage due to any defective equipment manufactured or assembled by **LEADER**. Some countries do not allow the exclusion or limitation of damages: the above section may or may not be applicable depending on the country.

LEADER cannot be held liable under this limited warranty if the equipment has been used inappropriately or negligently (including the absence of reasonable maintenance), or if it has suffered accidents or been repaired or modified by a third party.

THIS WARRANTY IS ONLY AN EXPLICIT LIMITED WARRANTY. LEADER DOES NOT ACCEPT ANY IMPLICIT WARRANTY FOR COMMERCIAL QUALITY AND SUITABILITY FOR ANY OTHER SPECIFIC USE. NO OTHER WARRANTY (OF ANY TYPE WHATSOEVER) THAN THE WARRANTY GIVEN BY LEADER IN THIS DOCUMENT WILL BE ACCEPTED.



MANUFACTURER

LEADER S.A.S.

Z.I. des Hautes-Vallées
Chemin n° 34
CS20014
76930 Octeville sur Mer
France



www.leader-group.eu

www.LeaderNorthAmerica.com

Our policy is to constantly seek to improve our products. We therefore reserve the right to change their technical specifications at any time and without prior notice. - Non contractual images



PLEASE RECYCLE

Code Notice :
CAM.00.ZN8.22.EN.4